



IATF 16949:2016 ISO9001



LED Warning Beacon

Lighting Solution For Agricultural Machinery

2026
NEW ARRIVAL

ECE R65 EMC R10 RoHS 2002/95/EC CE E

Foshan Xingyuan Auto Accessories Co.,Ltd

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour



45 LED




WL1240S-B1

Magnetic Base+Cigar Plug




WL1241S-B1

Screw Base



WL1243S-B1

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1246S-B1

Magnetic Base+Cigar Plug




WL1247S-B1

Screw Base



WL1249S-B1

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1252S-B1

Magnetic Base+Cigar Plug




WL1253S-B1

Screw Base



WL1255S-B1

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1258S-B1

Magnetic Base+Cigar Plug




WL1259S-B1

Screw Base



WL1261S-B1

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1240S-B2

Magnetic Base+Cigar Plug




WL1241S-B2

Screw Base



WL1243S-B2

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

45 LED

ROTATING




Amber Light Colour




WL1246S-B2

Magnetic Base+Cigar Plug




WL1247S-B2

Screw Base



WL1249S-B2

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1252S-B2

Magnetic Base+Cigar Plug




WL1253S-B2

Screw Base



WL1255S-B2

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1258S-B2

Magnetic Base+Cigar Plug




WL1259S-B2

Screw Base



WL1261S-B2

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1240S-B3

Magnetic Base+Cigar Plug




WL1241S-B3

Screw Base



WL1243S-B3

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1246S-B3

Magnetic Base+Cigar Plug




WL1247S-B3

Screw Base



WL1249S-B3

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1252S-B3

Magnetic Base+Cigar Plug




WL1253S-B3

Screw Base



WL1255S-B3

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1258S-B3

Magnetic Base+Cigar Plug




WL1259S-B3

Screw Base



WL1261S-B3

Flexible DIN Base



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM

LED WARNING BEACON

NEW
ARRIVALS

ROTATING



Amber Light Colour




45 LED




WL1264

DIN Flexible pole




WL1265

DIN Flexible pole



WL1266

DIN Flexible pole



Base Material	ABS
Lens Material	PC
Working Temperature	-40°C+80°C

Accessories



FIG-2



FIG-3



FIG-7A



FIG-4



FIG-3-40CM



AMBER LENS

R65 LED BEACON

12~24VDC



WL1401-MG

WL1401-FX

WL1401-SC


PART NO.

- **WL1401-MG** Magnetic Base+Cigar Plug
- **WL1401-FX** Flexible DIN Base
- **WL1401-SC** Screw Base

FEATURES

- Certified powerful ECE R65 performance in all colour.
- Aero-dynamic Smooth dome lens for best appearance.
- Low profile design with only 88mm in height.
- Multiple mounting styles for all vehicle applications.
- 12~24VDC operation.
- Non-volatile flash pattern memory.
- Mult-units synchronization in simultaneous or alternating flash.
- 100,000 hours rated Long-Life LED.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.

DIMENSIONS

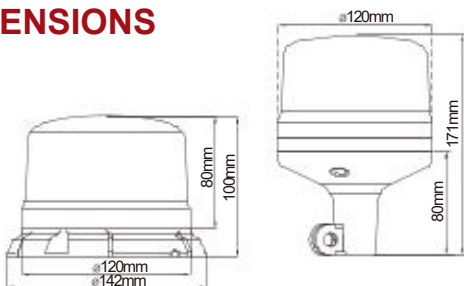

SPECIFICATIONS

Compliance: ECE R65 (TA1, TB2, TR1); ECE R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Pattern: 11 Flash Patterns

LED Elements: 3W LED x 8 pcs

Avg. Current: 1.2A @12.8VDC / 0.7A @24VDC
(varies by flash pattern)

Avg. Power: 15W (varies by flash pattern)

Max. Current: 2.4A @12.8VDC / 1.3A @24VDC

Max. Power: 30W

Wire: Magnetic Mount

- Single button cigar-plug: 300cm / 118.11in
- European cigar-plug: 250cm / 98.42in

Permanent Mount

- Red-Vcc : 40cm / 15.74in (20AWG)
- Black-GND: 40cm / 15.74in (20AWG)
- Yellow-Flash Pattern & Sync: 40cm / 15.74in (20AWG)
- White-Phase: 40cm / 15.74in (20AWG)

Recommended Fuse Rating: 5A

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

Multi-Unit Synchronization: Up to 15 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

FLASH PATTERN

FP#	FLASH PATTERN	FP#	FLASH PATTERN
1	Double [R65]	7	Quint [SAE]
2	Single [2Hz]	8	Mega
3	Quad [2Hz]	9	Ultra [SAE]
4	Single [SAE, CA13]	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Quad [SAE]		

*Actual approval is based on the model ordered.

WARNING BEACON

CLEAR LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1401-MG** Magnetic Base+Cigar Plug
- **WL1401-FX** Flexible DIN Base
- **WL1401-SC** Screw Base

FEATURES

- Certified powerful ECE R65 performance in all colour.
- Aero-dynamic Smooth dome lens for best appearance.
- Low profile design with only 88mm in height.
- Multiple mounting styles for all vehicle applications.
- 12~24VDC operation.
- Non-volatile flash pattern memory.
- Mult-units synchronization in simultaneous or alternating flash.
- 100,000 hours rated Long-Life LED.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.

DIMENSIONS

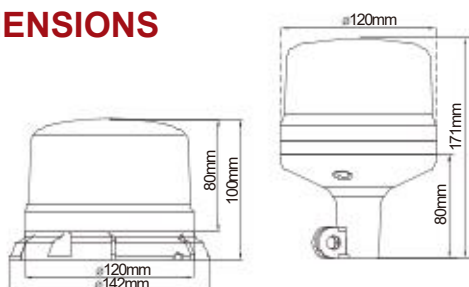

WL1401-MG

WL1401-FX

WL1401-SC



SPECIFICATIONS

Compliance: ECE R65 (TA1, TB2, TR1); ECE R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Pattern: 11 Flash Patterns

LED Elements: 3W LED x 8 pcs

Avg. Current: 1.2A @12.8VDC / 0.7A @24VDC (varies by flash pattern)

Avg. Power: 15W (varies by flash pattern)

Max. Current: 2.4A @12.8VDC / 1.3A @24VDC

Max. Power: 30W

Wire: Magnetic Mount

- Single button cigar-plug: 300cm / 118.11in
- European cigar-plug: 250cm / 98.42in

Permanent Mount

- Red-Vcc : 40cm / 15.74in (20AWG)
- Black-GND: 40cm / 15.74in (20AWG)
- Yellow-Flash Pattern & Sync: 40cm / 15.74in (20AWG)
- White-Phase: 40cm / 15.74in (20AWG)

Recommended Fuse Rating: 5A

LED Colour: Red, Blue , or Amber

Lens Colour: Red, Blue , or Amber

Multi-Unit Synchronization: Up to 15 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

FLASH PATTERN

FP#	FLASH PATTERN	FP#	FLASH PATTERN
1	Double [R65]	7	Quint [SAE]
2	Single [2Hz]	8	Mega
3	Quad [2Hz]	9	Ultra [SAE]
4	Single [SAE, CA13]	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Quad [SAE]		

*Actual approval is based on the model ordered.

WARNING BEACON

SMOKED LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1401-MG** Magnetic Base+Cigar Plug
- **WL1401-FX** Flexible DIN Base
- **WL1401-SC** Screw Base

FEATURES

- Certified powerful ECE R65 performance in all colour.
- Aero-dynamic Smooth dome lens for best appearance.
- Low profile design with only 88mm in height.
- Multiple mounting styles for all vehicle applications.
- 12~24VDC operation.
- Non-volatile flash pattern memory.
- Mult-units synchronization in simultaneous or alternating flash.
- 100,000 hours rated Long-Life LED.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.

DIMENSIONS

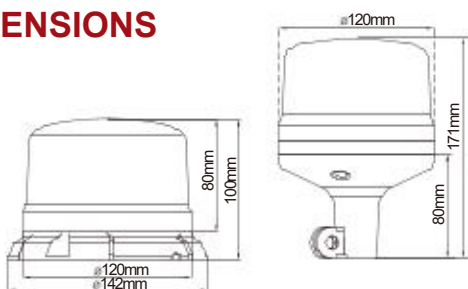

WL1401-MG

WL1401-FX

WL1401-SC



SPECIFICATIONS

Compliance: ECE R65 (TA1, TB2, TR1); ECE R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Pattern: 11 Flash Patterns

LED Elements: 3W LED x 8 pcs

Avg. Current: 1.2A @12.8VDC / 0.7A @24VDC (varies by flash pattern)

Avg. Power: 15W (varies by flash pattern)

Max. Current: 2.4A @12.8VDC / 1.3A @24VDC

Max. Power: 30W

Wire: Magnetic Mount

- Single button cigar-plug: 300cm / 118.11in
- European cigar-plug: 250cm / 98.42in

Permanent Mount

- Red-Vcc : 40cm / 15.74in (20AWG)
- Black-GND: 40cm / 15.74in (20AWG)
- Yellow-Flash Pattern & Sync: 40cm / 15.74in (20AWG)
- White-Phase: 40cm / 15.74in (20AWG)

Recommended Fuse Rating: 5A

LED Colour: Red, Blue , or Amber

Lens Colour: Red, Blue , or Amber

Multi-Unit Synchronization: Up to 15 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

FLASH PATTERN

FP#	FLASH PATTERN	FP#	FLASH PATTERN
1	Double [R65]	7	Quint [SAE]
2	Single [2Hz]	8	Mega
3	Quad [2Hz]	9	Ultra [SAE]
4	Single [SAE, CA13]	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Quad [SAE]		

*Actual approval is based on the model ordered.

AMBER LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1402-MG** Magnetic Base+Cigar Plug
- **WL1402-FX** Flexible DIN Base
- **WL1402-SC** Screw Base

FEATURES

- Multi-Voltage Input 12~24VDC.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

DIMENSIONS

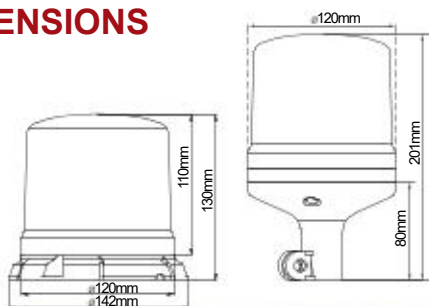

WL1402-MG

WL1402-FX

WL1402-SC



SPECIFICATIONS

Compliance: ECE R65(TA1; TB1; TR1); ECE-R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Patterns: 14 Flash Patterns

LED Elements: 3W LED x 10pcs

Avg. Current: 1.7A @12.8VDC / 0.88A @24VDC (varies with flash pattern)

Avg. Power: 21 W (varies with flash pattern)

Max. Current: 3.3A @12.8VDC / 1.75A @24VDC

Max. Power: 42 W

Wires: *Magnetic Mount*

- Single button cigar-plug: 300cm
- European cigar-plug: 250cm

Permanent Mount

- Red-Vcc : 40cm /15.74in (20AWG)
- Black-GND: 40cm /15.74in (20AWG)
- Yellow-Flash Patterns & Sync: 40cm /15.74in (20AWG)
- White-Phase: 40cm /15.74in (20AWG)

Recommended Fuse : 5A

Multi-Unit Synchronization: Up to 4 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

FLASH PATTERN

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
1	Double [R65]	8	Mega
2	Single [2Hz]	9	Ultra [SAE]
3	Quad [2Hz]	10	Single-Quad
4	Single [SAE, CA13]	11	Single H/L
5	Double [SAE]	12	Single Column Rotator
6	Quad [SAE]	13	Double Column Rotator
7	Quint [SAE]	14	Double Column Rotator - Quint

WARNING BEACON

CLEAR LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1402-MG** Magnetic Base+Cigar Plug
- **WL1402-FX** Flexible DIN Base
- **WL1402-SC** Screw Base

FEATURES

- Multi-Voltage Input 12~24VDC.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

DIMENSIONS

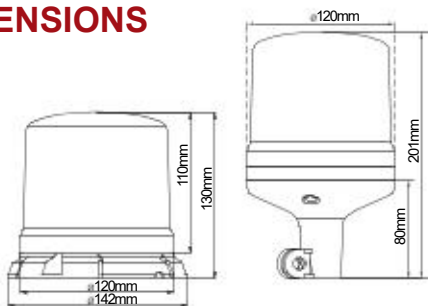

WL1402-MG

WL1402-FX

WL1402-SC



SPECIFICATIONS

Compliance: ECE R65(TA1; TB1; TR1); ECE-R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Patterns: 14 Flash Patterns

LED Elements: 3W LED x 10pcs

Avg. Current: 1.7A @12.8VDC / 0.88A @24VDC (varies with flash pattern)

Avg. Power: 21 W (varies with flash pattern)

Max. Current: 3.3A @12.8VDC / 1.75A @24VDC

Max. Power: 42 W

Wires: *Magnetic Mount*

- Single button cigar-plug: 300cm
- European cigar-plug: 250cm

Permanent Mount

- Red-Vcc : 40cm /15.74in (20AWG)
- Black-GND: 40cm /15.74in (20AWG)
- Yellow-Flash Patterns & Sync: 40cm /15.74in (20AWG)
- White-Phase: 40cm /15.74in (20AWG)

Recommended Fuse : 5A

Multi-Unit Synchronization: Up to 4 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

FLASH PATTERN

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
1	Double [R65]	8	Mega
2	Single [2Hz]	9	Ultra [SAE]
3	Quad [2Hz]	10	Single-Quad
4	Single [SAE, CA13]	11	Single H/L
5	Double [SAE]	12	Single Column Rotator
6	Quad [SAE]	13	Double Column Rotator
7	Quint [SAE]	14	Double Column Rotator - Quint

SMOKED LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1402-MG** Magnetic Base+Cigar Plug
- **WL1402-FX** Flexible DIN Base
- **WL1402-SC** Screw Base

FEATURES

- Multi-Voltage Input 12~24VDC.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

DIMENSIONS

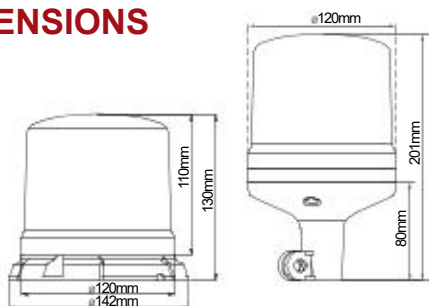

WL1402-MG

WL1402-FX

WL1402-SC



SPECIFICATIONS

Compliance: ECE R65(TA1; TB1; TR1); ECE-R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Patterns: 14 Flash Patterns

LED Elements: 3W LED x 10pcs

Avg. Current: 1.7A @12.8VDC / 0.88A @24VDC (varies with flash pattern)

Avg. Power: 21 W (varies with flash pattern)

Max. Current: 3.3A @12.8VDC / 1.75A @24VDC

Max. Power: 42 W

Wires: *Magnetic Mount*

- Single button cigar-plug: 300cm
- European cigar-plug: 250cm

Permanent Mount

- Red-Vcc : 40cm /15.74in (20AWG)
- Black-GND: 40cm /15.74in (20AWG)
- Yellow-Flash Patterns & Sync: 40cm /15.74in (20AWG)
- White-Phase: 40cm /15.74in (20AWG)

Recommended Fuse : 5A

Multi-Unit Synchronization: Up to 4 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

FLASH PATTERN

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
1	Double [R65]	8	Mega
2	Single [2Hz]	9	Ultra [SAE]
3	Quad [2Hz]	10	Single-Quad
4	Single [SAE, CA13]	11	Single H/L
5	Double [SAE]	12	Single Column Rotator
6	Quad [SAE]	13	Double Column Rotator
7	Quint [SAE]	14	Double Column Rotator - Quint



AMBER LENS

R65 LED BEACON

12~24VDC



WL1403-MG

WL1403-BL


PART NO.

- **WL1403-MG** Magnetic Base+Cigar Plug
- **WL1403-BL** Bolt Base

FEATURES

- Certified powerful ECE R65 performance in all colour.
- Aero-dynamic Smooth dome lens for best appearance.
- Low profile design with only 88mm in height.
- Multiple mounting styles for all vehicle applications.
- 12~24VDC operation.
- Non-volatile flash pattern memory.
- Mult-units synchronization in simultaneous or alternating flash.
- 100,000 hours rated Long-Life LED.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.

DIMENSIONS

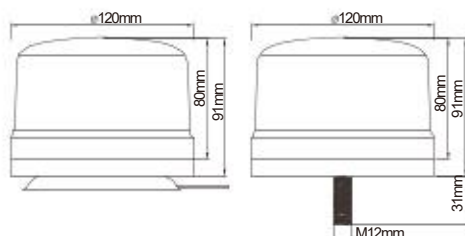

SPECIFICATIONS

Compliance: ECE R65 (TA1, TB2, TR1); ECE R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Pattern: 11 Flash Patterns

LED Elements: 3W LED x 8 pcs

Avg. Current: 1.2A @12.8VDC : 0.7A @24VDC
(varies by flash pattern)

Avg. Power: 15W (varies by flash pattern)

Max. Current: 2.4A @12.8VDC / 1.3A @24VDC

Max. Power: 30W

Wire: Magnetic Mount

- Single button cigar-plug: 300cm / 118.11in
- European cigar-plug: 250cm / 98.42in

Permanent Mount

- Red-Vcc : 40cm / 15.74in (20AWG)
- Black-GND: 40cm / 15.74in (20AWG)
- Yellow-Flash Pattern & Sync: 40cm / 15.74in (20AWG)
- White-Phase: 40cm / 15.74in (20AWG)

Recommended Fuse Rating: 5A

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

Multi-Unit Synchronization: Up to 15 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

FLASH PATTERN

FP#	FLASH PATTERN	FP#	FLASH PATTERN
1	Double [R65]	7	Quint [SAE]
2	Single [2Hz]	8	Mega
3	Quad [2Hz]	9	Ultra [SAE]
4	Single [SAE, CA13]	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Quad [SAE]		

*Actual approval is based on the model ordered.

WARNING BEACON



CLEAR LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1403-MG** Magnetic Base+Cigar Plug
- **WL1403-BL** Bolt Base

FEATURES

- Certified powerful ECE R65 performance in all colour.
- Aero-dynamic Smooth dome lens for best appearance.
- Low profile design with only 88mm in height.
- Multiple mounting styles for all vehicle applications.
- 12~24VDC operation.
- Non-volatile flash pattern memory.
- Multit-units synchronization in simultaneous or alternating flash.
- 100,000 hours rated Long-Life LED.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.

DIMENSIONS

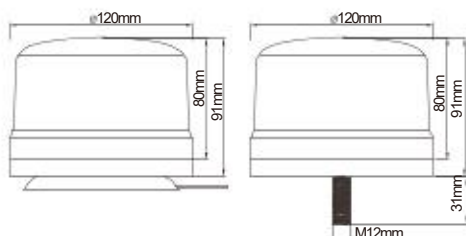

WL1403-MG

WL1403-BL



SPECIFICATIONS

Compliance: ECE R65 (TA1, TB2, TR1); ECE R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Pattern: 11 Flash Patterns

LED Elements: 3W LED x 8 pcs

Avg. Current: 1.2A @12.8VDC / 0.7A @24VDC (varies by flash pattern)

Avg. Power: 15W (varies by flash pattern)

Max. Current: 2.4A @12.8VDC / 1.3A @24VDC

Max. Power: 30W

Wire: Magnetic Mount

- Single button cigar-plug: 300cm / 118.11in
- European cigar-plug: 250cm / 98.42in

Permanent Mount

- Red-Vcc : 40cm / 15.74in (20AWG)
- Black-GND: 40cm / 15.74in (20AWG)
- Yellow-Flash Pattern & Sync: 40cm / 15.74in (20AWG)
- White-Phase: 40cm / 15.74in (20AWG)

Recommended Fuse Rating: 5A

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

Multi-Unit Synchronization: Up to 15 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

FLASH PATTERN

FP#	FLASH PATTERN	FP#	FLASH PATTERN
1	Double [R65]	7	Quint [SAE]
2	Single [2Hz]	8	Mega
3	Quad [2Hz]	9	Ultra [SAE]
4	Single [SAE, CA13]	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Quad [SAE]		

*Actual approval is based on the model ordered.

WARNING BEACON



SMOKED LENS

R65 LED BEACON

12~24VDC



WL1403-MG

WL1403-BL


PART NO.

- **WL1403-MG** Magnetic Base+Cigar Plug
- **WL1403-BL** Bolt Base

FEATURES

- Certified powerful ECE R65 performance in all colour.
- Aero-dynamic Smooth dome lens for best appearance.
- Low profile design with only 88mm in height.
- Multiple mounting styles for all vehicle applications.
- 12~24VDC operation.
- Non-volatile flash pattern memory.
- Mult-units synchronization in simultaneous or alternating flash.
- 100,000 hours rated Long-Life LED.
- Reverse polarity protection.
- Weatherproof and shockproof capability for all environment.

DIMENSIONS

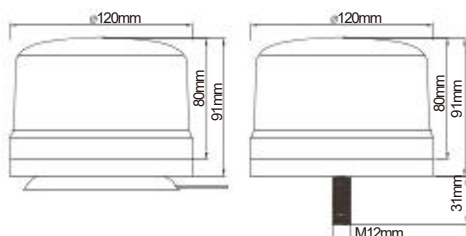

SPECIFICATIONS

Compliance: ECE R65 (TA1, TB2, TR1); ECE R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Pattern: 11 Flash Patterns

LED Elements: 3W LED x 8 pcs

Avg. Current: 1.2A @12.8VDC / 0.7A @24VDC
(varies by flash pattern)

Avg. Power: 15W (varies by flash pattern)

Max. Current: 2.4A @12.8VDC / 1.3A @24VDC

Max. Power: 30W

Wire: Magnetic Mount

- Single button cigar-plug: 300cm / 118.11in
- European cigar-plug: 250cm / 98.42in

Permanent Mount

- Red-Vcc : 40cm / 15.74in (20AWG)
- Black-GND: 40cm / 15.74in (20AWG)
- Yellow-Flash Pattern & Sync: 40cm / 15.74in (20AWG)
- White-Phase: 40cm / 15.74in (20AWG)

Recommended Fuse Rating: 5A

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

Multi-Unit Synchronization: Up to 15 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

FLASH PATTERN

FP#	FLASH PATTERN	FP#	FLASH PATTERN
1	Double [R65]	7	Quint [SAE]
2	Single [2Hz]	8	Mega
3	Quad [2Hz]	9	Ultra [SAE]
4	Single [SAE, CA13]	10	Single-Quad
5	Double [SAE]	11	Single H/L
6	Quad [SAE]		

*Actual approval is based on the model ordered.



AMBER LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1404-MG** Magnetic Base+Cigar Plug
- **WL1404-BL** Bolt Base

FEATURES

- Multi-Voltage Input 12~24VDC.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

DIMENSIONS

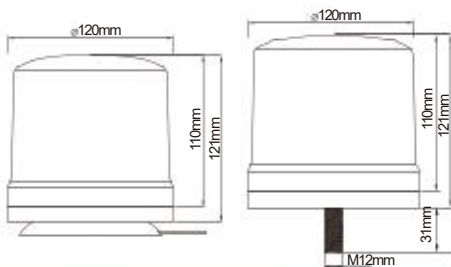

WL1404-MG

WL1404-BL



SPECIFICATIONS

Compliance: ECE R65(TA1; TB1; TR1); ECE-R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Patterns: 14 Flash Patterns

LED Elements: 3W LED x 10pcs

Avg. Current: 1.7A @12.8VDC ; 0.88A @24VDC (varies with flash pattern)

Avg. Power: 21 W (varies with flash pattern)

Max. Current: 3.3A @12.8VDC ; 1.75A @24VDC

Max. Power: 42 W

Wires: *Magnetic Mount*

- Single button cigar-plug: 300cm
- European cigar-plug: 250cm

Permanent Mount

- Red-Vcc : 40cm ;15.74in (20AWG)
- Black-GND: 40cm ;15.74in (20AWG)
- Yellow-Flash Patterns & Sync: 40cm ;15.74in (20AWG)
- White-Phase: 40cm ;15.74in (20AWG)

Recommended Fuse : 5A

Multi-Unit Synchronization: Up to 4 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

FLASH PATTERN

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
1	Double [R65]	8	Mega
2	Single [2Hz]	9	Ultra [SAE]
3	Quad [2Hz]	10	Single-Quad
4	Single [SAE, CA13]	11	Single H,L
5	Double [SAE]	12	Single Column Rotator
6	Quad [SAE]	13	Double Column Rotator
7	Quint [SAE]	14	Double Column Rotator - Quint

WARNING BEACON

CLEAR LENS

R65 LED BEACON

12~24VDC


PART NO.

- **WL1404-MG** Magnetic Base+Cigar Plug
- **WL1404-BL** Bolt Base

FEATURES

- Multi-Voltage Input 12~24VDC.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

DIMENSIONS

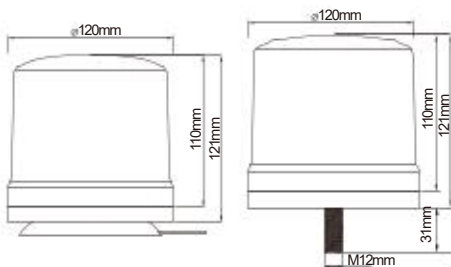

WL1404-MG

WL1404-BL



SPECIFICATIONS

Compliance: ECE R65(TA1; TB1; TR1); ECE-R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Patterns: 14 Flash Patterns

LED Elements: 3W LED x 10pcs

Avg. Current: 1.7A @12.8VDC / 0.88A @24VDC (varies with flash pattern)

Avg. Power: 21 W (varies with flash pattern)

Max. Current: 3.3A @12.8VDC / 1.75A @24VDC

Max. Power: 42 W

Wires: *Magnetic Mount*

- Single button cigar-plug: 300cm
- European cigar-plug: 250cm

Permanent Mount

- Red-Vcc : 40cm /15.74in (20AWG)
- Black-GND: 40cm /15.74in (20AWG)
- Yellow-Flash Patterns & Sync: 40cm /15.74in (20AWG)
- White-Phase: 40cm /15.74in (20AWG)

Recommended Fuse : 5A

Multi-Unit Synchronization: Up to 4 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

FLASH PATTERN

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
1	Double [R65]	8	Mega
2	Single [2Hz]	9	Ultra [SAE]
3	Quad [2Hz]	10	Single-Quad
4	Single [SAE, CA13]	11	Single H/L
5	Double [SAE]	12	Single Column Rotator
6	Quad [SAE]	13	Double Column Rotator
7	Quint [SAE]	14	Double Column Rotator - Quint

WARNING BEACON



SMOKED LENS

R65 LED BEACON

12~24VDC



WL1404-MG

WL1404-BL


PART NO.

- **WL1404-MG** Magnetic Base+Cigar Plug
- **WL1404-BL** Bolt Base

FEATURES

- Multi-Voltage Input 12~24VDC.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

DIMENSIONS

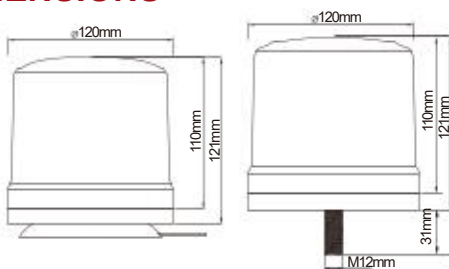

SPECIFICATIONS

Compliance: ECE R65(TA1; TB1; TR1); ECE-R10; SAE J845; CA13; IPX5

Operating Voltage: 12~24VDC

Warning Patterns: 14 Flash Patterns

LED Elements: 3W LED x 10pcs

Avg. Current: 1.7A @12.8VDC / 0.88A @24VDC (varies with flash pattern)

Avg. Power: 21 W (varies with flash pattern)

Max. Current: 3.3A @12.8VDC / 1.75A @24VDC

Max. Power: 42 W

Wires: *Magnetic Mount*

- Single button cigar-plug: 300cm
- European cigar-plug: 250cm

Permanent Mount

- Red-Vcc : 40cm /15.74in (20AWG)
- Black-GND: 40cm /15.74in (20AWG)
- Yellow-Flash Patterns & Sync: 40cm /15.74in (20AWG)
- White-Phase: 40cm /15.74in (20AWG)

Recommended Fuse : 5A

Multi-Unit Synchronization: Up to 4 units

Storage Temperature: -40°C to +75°C

Operating Temperature: -30°C to +65°C

LED Colour: Red, Blue, or Amber

Lens Colour: Red, Blue, or Amber

FLASH PATTERN

FP#	FLASH PATTERNS	FP#	FLASH PATTERNS
1	Double [R65]	8	Mega
2	Single [2Hz]	9	Ultra [SAE]
3	Quad [2Hz]	10	Single-Quad
4	Single [SAE, CA13]	11	Single H/L
5	Double [SAE]	12	Single Column Rotator
6	Quad [SAE]	13	Double Column Rotator
7	Quint [SAE]	14	Double Column Rotator - Quint

High Profile

Warning Beacon

SERIES



104mm
height





Smoked Lens



Amber Lens



Clear Lens



WARNING BEACON



New!

16 LED

LED
High Power



Part no.	Mount
WL1520-FB	Flexible DIN Base

Part no.	Mount
WL1520-MG	Magnetic Base+Cigar Plug

Part no.	Mount
WL1520-BT	Bolt Base




Part no.	Mount
WL1520-SC	Flexible DIN Base

Part no.	Mount
WL1520-SPC	Flexible base with screwing cap

Part no.	Mount
WL1520-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

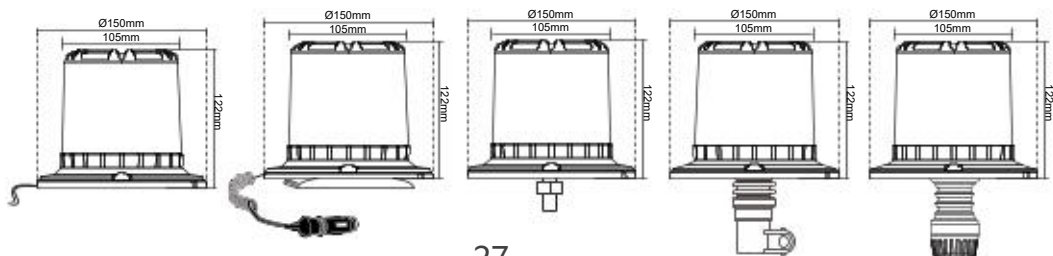

WARNING BEACON



New!

16 LED

LED
High Power



Part no.	Mount
WL1520N-FB	Flexible DIN Base



Part no.	Mount
WL1520N-MG	Magnetic Base+Cigar Plug



Part no.	Mount
WL1520N-BT	Bolt Base





Part no.	Mount
WL1520N-SPC	Flexible base with screwing cap



Part no.	Mount
WL1520N-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



New!

16 LED

LED
High Power



Part no.	Mount
WL1521-FB	Flexible DIN Base



Part no.	Mount
WL1521-SPC	Flexible base with screwing cap



Part no.	Mount
WL1521-MG	Magnetic Base+Cigar Plug



Part no.	Mount
WL1521-FPB	Flexible base with bolt base




Part no.	Mount
WL1521-BT	Bolt Base



FUNCTION SWITCH

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

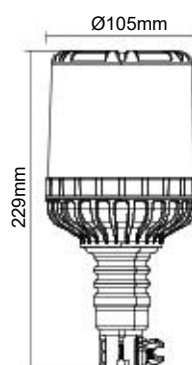

Medium Profile

Warning Beacon

SERIES



70mm
height




**Smoked
Lens**



**Amber
Lens**



**Clear
Lens**

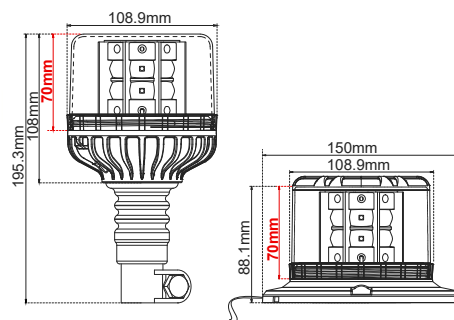

WARNING BEACON



16 LED

**SMOKED
LENS**

New!



**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.	Mount
WL1300SM-FB	Flexible DIN Base

Part no.	Mount
WL1300SM-MG	Magnetic Base+Cigar Plug

Part no.	Mount
WL1300SM-BT	Bolt Base









Part no.	Mount
WL1300SM-SC	Flexible DIN Base

Part no.	Mount
WL1300SM-SPC	Flexible base with screwing cap

Part no.	Mount
WL1300SM-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40 °C ~ +60 °C



WARNING BEACON



16 LED

**SMOKED
LENS**

New!



**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.	Mount
WL1300ST-FB	Flexible DIN Base



Part no.	Mount
WL1300ST-MG	Magnetic Base+Cigar Plug



Part no.	Mount
WL1300ST-BT	Bolt Base



Part no.	Mount
WL1300ST-SC	Flexible DIN Base









Part no.	Mount
WL1300ST-SPC	Flexible base with screwing cap



Part no.	Mount
WL1300ST-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



16 LED

**SMOKED
LENS**

New!



**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.
WL1300SMBK-FB

Mount
Flexible DIN Base



Part no.
WL1300SMBK-MG

Mount
Magnetic Base+Cigar Plug



Part no.
WL1300SMBK-BT

Mount
Bolt Base



Part no.
WL1300SMBK-SC

Mount
Flexible DIN Base



Part no.
WL1300SMBK-SPC

Mount
Flexible base with screwing cap









Part no.
WL1300SMBK-FPB

Mount
Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40 °C ~ +60 °C



WARNING BEACON



16 LED

SMOKED LENS

New!



**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.	Mount
WL1300STBK-FB	Flexible DIN Base

Part no.	Mount
WL1300STBK-MG	Magnetic Base+Cigar Plug

Part no.	Mount
WL1300STBK-BT	Bolt Base




Part no.	Mount
WL1300STBK-SC	Flexible DIN Base

Part no.	Mount
WL1300STBK-SPC	Flexible base with screwing cap

Part no.	Mount
WL1300STBK-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

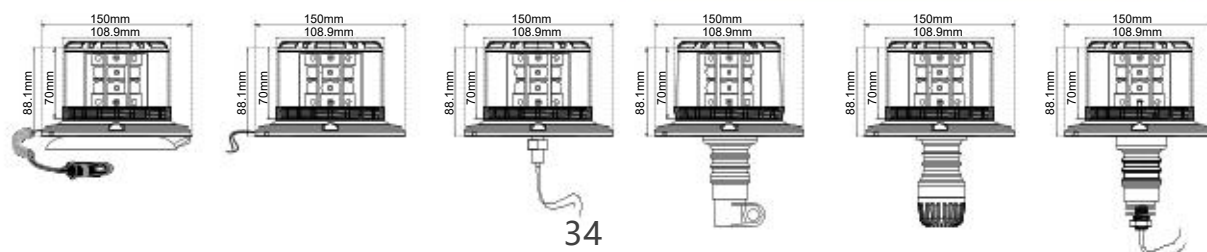

WARNING BEACON



16 LED

**SMOKED
LENS**

New!



**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.	Mount
WL1299SM-FB	Flexible DIN Base



Part no.	Mount
WL1299SM-MG	Magnetic Base+Cigar Plug



Part no.	Mount
WL1299SM-SP	Screwing cap



Part no.	Mount
WL1299SM-SC	Flexible DIN Base









Part no.	Mount
WL1299SM-SPC	Flexible base with screwing cap



Part no.	Mount
WL1299SM-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C




WARNING BEACON



16 LED

**SMOKED
LENS**

New!

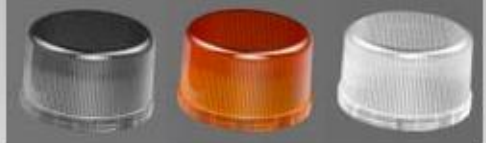

**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.	Mount
WL1299ST-FB	Flexible DIN Base



Part no.	Mount
WL1299ST-MG	Magnetic Base+Cigar Plug



Part no.	Mount
WL1299ST-SP	Screwing cap



Part no.	Mount
WL1299ST-SC	Flexible DIN Base









Part no.	Mount
WL1299ST-SPC	Flexible base with screwing cap



Part no.	Mount
WL1299ST-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C




WARNING BEACON



16 LED

**SMOKED
LENS**

New!

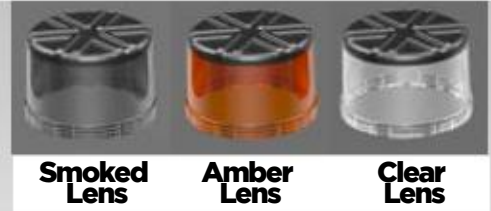

Part no.	Mount
WL1299SMBK-FB	Flexible DIN Base

Part no.	Mount
WL1299SMBK-MG	Magnetic Base+Cigar Plug

Part no.	Mount
WL1299SMBK-SP	Screwing cap









Part no.	Mount
WL1299SMBK-SC	Flexible DIN Base

Part no.	Mount
WL1299SMBK-SPC	Flexible base with screwing cap

Part no.	Mount
WL1299SMBK-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



16 LED

**SMOKED
LENS**

New!



**Smoked
Lens**

**Amber
Lens**

**Clear
Lens**



Part no.	Mount
WL1299STBK-FB	Flexible DIN Base

Part no.	Mount
WL1299STBK-MG	Magnetic Base+Cigar Plug

Part no.	Mount
WL1299STBK-SP	Screwing cap









Part no.	Mount
WL1299STBK-6C	Flexible DIN Base

Part no.	Mount
WL1299STBK-SPC	Flexible base with screwing cap

Part no.	Mount
WL1299STBK-FPB	Flexible base with bolt base

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



SMOKED LENS *New!*

24 LED

LED
High Power



Part no.	Mount
WL400HB-ST	Magnetic Base+Cigar Plug



Part no.	Mount
WL430HB-ST	Bolt Base



Part no.	Mount
WL401HB-SP-ST	Screw cap



Part no.	Mount
WL401HB-ST	Flexible DIN Base




Part no.	Mount
WL401HB-SPC-ST	Flexible base with screwing cap

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

► DIMENSIONS

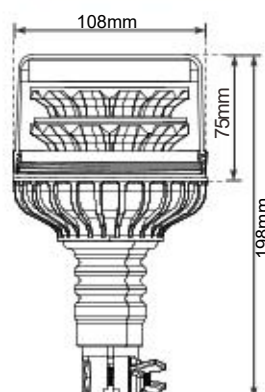

WARNING BEACON



AMBER LENS

New!

24 LED

LED
High Power



FUNCTION
SWITCH



Part no.	Mount
WL400HB-ST	Magnetic Base+Cigar Plug



Part no.	Mount
WL430HB-ST	Bolt Base



Part no.	Mount
WL401HB-SP-ST	Screw cap



Part no.	Mount
WL401HB-ST	Flexible DIN Base




Part no.	Mount
WL401HB-SPC-ST	Flexible base with screwing cap

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

► DIMENSIONS

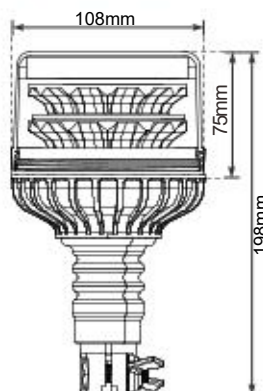

WARNING BEACON



24 LED

LED
High Power



WL401HB

with flexible DIN base




WL401HB-ST

with flexible DIN base



**FUNCTION
SWITCH**

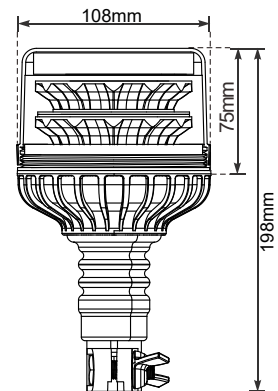

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



90 LED

LED
High Power




WL950HB
with flexible DIN base



WL950HB-ST
with flexible DIN base



**FUNCTION
SWITCH**

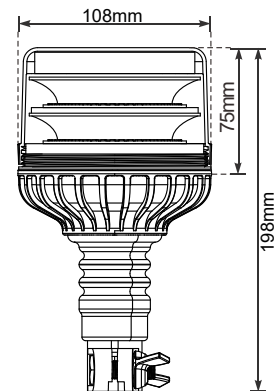

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



16 LED

LED
High Power



WL822HB

with flexible DIN base




WL822HB-ST

with flexible DIN base



**FUNCTION
SWITCH**

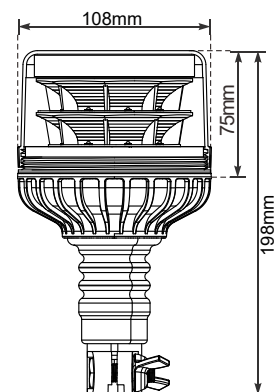

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WARNING BEACON



16 LED



High Power



WL401HBPRO

with flexible DIN base




WL401HBPRO-ST

with flexible DIN base



**FUNCTION
SWITCH**

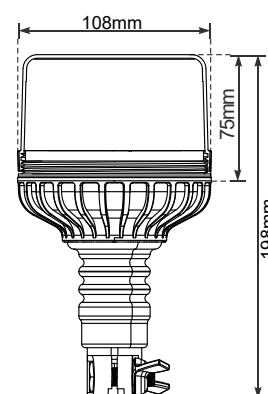

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



Low Profile

Warning Beacon

SERIES



WARNING BEACON



45 LED

LED
High Power



WL401SNB
with flexible DIN base



WL401SNB-ST
with flexible DIN base



WL401SNB-BK
with flexible DIN base



WL401SNB-BK-ST
with flexible DIN base





**FUNCTION
SWITCH**

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

► DIMENSIONS



WARNING BEACON



12 LED

LED
High Power



FUNCTION SWITCH

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WL401NB



WL401NB-ST



WL401NB-BK



WL401NB-BK-ST



WL401NB-MG
Magnetic Base+Cigar Plug




WL401NB-BO
Bolt Base



WL401NB-FX
Flexible DIN base



WL401NB-SF
Flexible base with screwing cap



WARNING BEACON



8 LED



WL834NB-SMC

with flexible DIN base



WL834NB-STC

with flexible DIN base



WL834NB-SMC-BK

with flexible DIN base



WL834NB-STC-BK

with flexible DIN base

LED

High Power





**FUNCTION
SWITCH**

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

► DIMENSIONS



WARNING BEACON



36 LED

LED

High Power



WL1233NB

with flexible DIN base



WL1233NB-ST

with flexible DIN base



WL1233NB-BK

with flexible DIN base



WL1233NB-BK-ST

with flexible DIN base





**FUNCTION
SWITCH**

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

► DIMENSIONS



WARNING BEACON



8 LED

LED

High Power



WL401NBPRO

with flexible DIN base



WL401NBPRO-ST

with flexible DIN base



WL401NBPRO-BK

with flexible DIN base



WL401NBPRO-BK-ST

with flexible DIN base





FUNCTION SWITCH

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

► DIMENSIONS



WARNING BEACON



45 LED

**SMOKED
LENS**

LED
High Power



**FUNCTION
SWITCH**



WL401SNB



WL401SNB-ST



WL401SNB-BK



WL401SNB-BK-ST

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WL401SNB-MG
Magnetic Base+Cigar Plug




WL401SNB-BO
Bolt Base



WL401SNB-FX
Flexible DIN base



WL401SNB-SF
Flexible base with screwing cap



WARNING BEACON



12 LED

**SMOKED
LENS**

LED

High Power



**FUNCTION
SWITCH**

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WL401NB



WL401NB-ST



WL401NB-BK



WL401NB-BK-ST



WL401NB-MG
Magnetic Base+Cigar Plug




WL401NB-BO
Bolt Base



WL401NB-FX
Flexible DIN base



WL401NB-SF
Flexible base with screwing cap



WARNING BEACON



New!

LED
High Power



Part no.	Mount
WL401NB-BK-ST-MG	Magnetic Base+Cigar Plug




Part no.	Mount
WL401NB-BK-ST-FX	Flexible DIN Base



Part no.	Mount
WL401NB-BK-ST-BO	Bolt Base



Part no.	Mount
WL401NB-BK-ST-SF	Flexible base with screwing cap

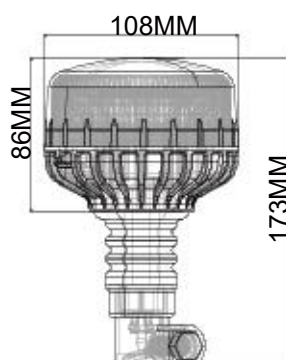

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

WARNING BEACON



8 LED

**SMOKED
LENS**



**FUNCTION
SWITCH**



WL834NB-SMC



WL834NB-STC



WL834NB-SMC-BK



WL834NB-STC-BK

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WL834NB-SMC-MG
Magnetic Base+Cigar Plug




WL834NB-SMC-BO
Bolt Base



WL834NB-SMC-FX
Flexible DIN base



WL834NB-SMC-SF
Flexible base with screwing cap

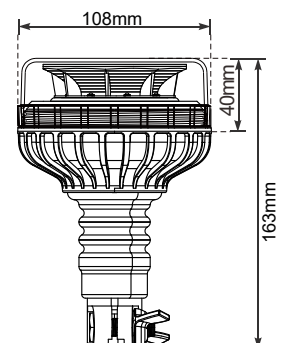

WARNING BEACON



36 LED

**SMOKED
LENS**

LED
High Power



**FUNCTION
SWITCH**



WL1233NB



WL1233NB-ST



WL1233NB-BK



WL1233NB-BK-ST

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C



WL1233NB-MG
Magnetic Base+Cigar Plug




WL1233NB-BO
Bolt Base



WL1233NB-FX
Flexible DIN base



WL1233NB-SF
Flexible base with screwing cap

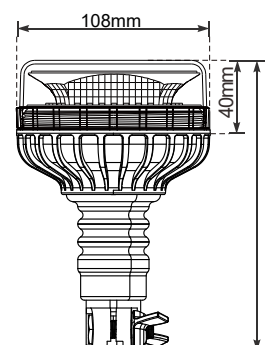

WARNING BEACON



SMOKED LENS *New!*

8 LED

LED
High Power



Part no.	Mount
WL401PRO	Flexible DIN Base



Part no.	Mount
WL400PRO	Magnetic Base+Cigar Plug



Part no.	Mount
WL401PRO-BO	Bolt Base




Part no.	Mount
WL431PRO	Flexible DIN Base




Part no.	Mount
WL401PRO-LP	Flexible base with screwing cap

► SPECIFICATIONS


VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C




WL431PRO




WL400PRO



WL401PRO-BO



WL401PRO



WL401PRO-LP

WARNING BEACON



AMBER LENS *New!*

LED
High Power



Part no.	Mount
WL1405-MG-SM	Magnetic Base+Cigar Plug



Part no.	Mount
WL1405-BO-SM	Bolt Base




Part no.	Mount
WL1405-FX-SM	Flexible DIN Base



Part no.	Mount
WL1405-SF-SM	Flexible base with screwing cap

► DIMENSIONS

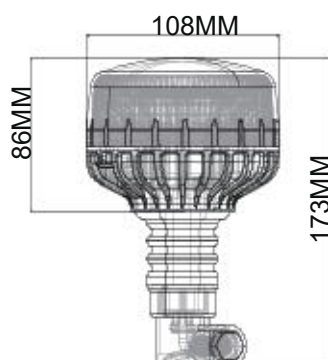

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

WARNING BEACON



CLEAR LENS *New!*

LED
High Power



Part no.	Mount
WL1405-MG-SM	Magnetic Base+Cigar Plug



Part no.	Mount
WL1405-BO-SM	Bolt Base




Part no.	Mount
WL1405-FX-SM	Flexible DIN Base



Part no.	Mount
WL1405-SF-SM	Flexible base with screwing cap

► DIMENSIONS

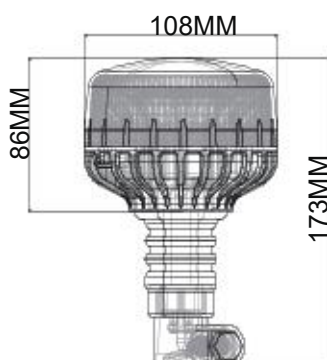

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

WARNING BEACON



SMOKED LENS

New!

LED
High Power



Part no.	Mount
WL1405-MG-SM	Magnetic Base+Cigar Plug



Part no.	Mount
WL1405-BO-SM	Bolt Base




Part no.	Mount
WL1405-FX-SM	Flexible DIN Base



Part no.	Mount
WL1405-SF-SM	Flexible base with screwing cap

► DIMENSIONS

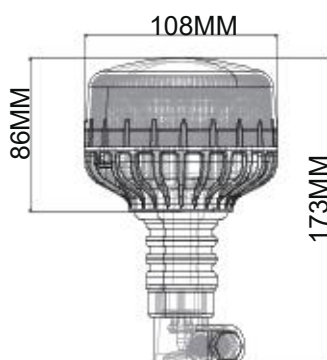

► SPECIFICATIONS

VOLTAGE	12-24V DC
IP-CLASS	IP65
FUNCTIONS	Single Flashing / Dual Flashing / Rotating
LIGHT SOURCE	High Power LED
EMC-CERTIFICATE	ECE R65 R10
OPERATING TEMPERATURE	-40°C ~ +60 °C

NEW

IATF 16949:2016



LED WARNING LIGHT

ECE R65 TA2 / ECE R65 TB2

NEW

EMERGENCY LED Light Bar

**ECE R65
TA2**

**With Remote
Controller** 



Amber Lens



Clear Lens



Smoked Lens




LTF-74



AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch

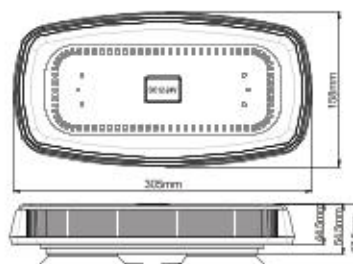

 + 
Magnetic

Part.No.	Light Source	Function	Waterproof	Working Temperature	Approvals
LTF-74	High Power LED	3 kind of flashing	IP65	-30°C ~ +60°C	R65 SAE

NEW

EMERGENCY LED Light Bar

**ECE R65
TA2**

**With Remote
Controller** 



Amber Lens



Clear Lens



Smoked Lens




LTF-72



AG-017
American Multi-function
ON/OFF Switch



PG-001
European Multi-function
ON/OFF Switch



 + 
Magnetic

Part.No.	Light Source	Function	Waterproof	Working Temperature	Approvals
LTF-72	High Power LED	3 kind of flashing	IP65	-30°C ~ +60°C	R65 SAE

NEW

LED STROBE LIGHT

With Synchronization function

**ECE R65
XA2**

36

Flashing Pattern



LED-20035-3

3x3W High Power LED
8kind of strobe function



LED-20035-4

4x3W High Power LED
12kind of strobe function




LED-20035-6


6x3W High Power LED
12kind of strobe function

► FEATURE


- Low profile design that allows for easy installation in a variety of locations
- Work current: DC12V@1.2A MAX
- Aluminum housing and polycarbonate lens
- Synchronize : Maximum of 8 Lightheads
- Multiple flash patterns with phase 1 and phase 2 syncing

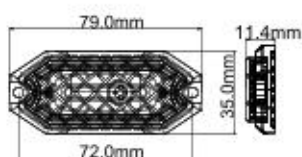

LED-20035-3

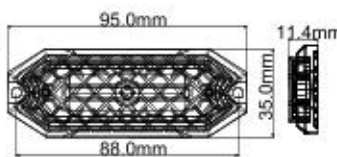

LED-20035-4

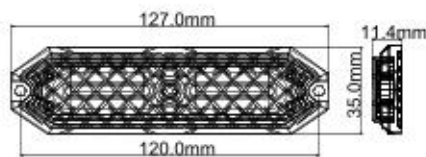

LED-20035-6

Part.No.	Light Source	Function	Waterproof	Working Temperature	Approvals
LED-20035	3W high power LED	36 Flashing Pattern	IP65	-30°C ~ +60°C	ECE R10 R65 SAE

NEW

LED WARNING BEACON

ECE R65
TB2

Approval No.:
TB1 E9*65R00/10*6231*00
Rotating R65 Blue



12 LED
Blue Lens



WL431-B
With Ultrathin design 3 bolt




WL430-B
With single bolt base



WL401-B
With flexible DIN base



WL400
With magnet base

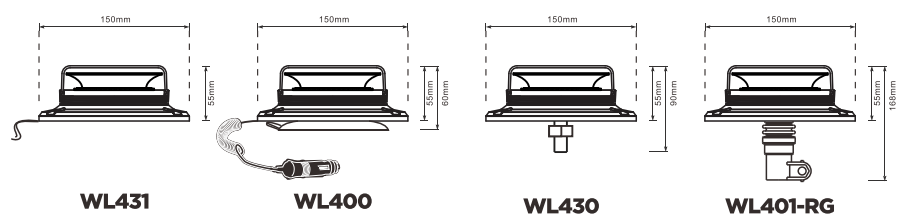

Input Voltage	Light Source	Function	Waterproof	Working Temperature	Approvals
DC12-24V	SMD3535 3WLED	Flashing, Rotating	IP65	-30°C ~ +60°C	ECE R10 R65

NEW

LED WARNING BEACON

**ECE R65
TA2**

Approval No.:
R65 E9*65R00*10*1916*00
R10 E9*10R05*01*1669*00



12 LED
Amber Lens



WL431
 With Ultrathin design 3 bolt




WL430
 With single bolt base



WL401-RG
 With flexible DIN base



WL400
 With magnet base

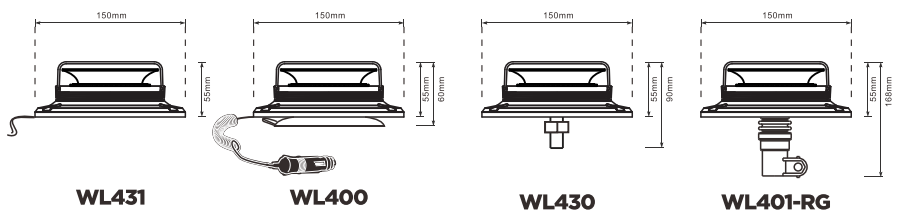

Input Voltage	Light Source	Function	Waterproof	Working Temperature	Approvals
DC12-24V	High Power LED	Single Flashing, Dual Flashing,Rotating	IP65	-30°C ~ +60°C	ECE R10 R65

NEW

LED WARNING BEACON

ECE R65
TA2

Approval No.:
TA2 E9*65R00 10*6515*00



24 LED
Smooth Lens



Part no.	Mount
WL1212-2	Magnetic Base+Cigar Plug



Part no.	Mount
WL1212-3	Bolt Base



Part no.	Mount
WL1212-7	Screw cap




Part no.	Mount
WL1212-4	Flexible DIN Base



Part no.	Mount
WL1212-5	Flexible base with screwing cap



FUNCTION SWITCH



Input Voltage	Light Source	Function	Waterproof	Working Temperature	Approvals
DC12-24V	High Power LED	Single Flashing, Dual Flashing,Rotating	IP65	-30°C ~ +60°C	ECE R10 R65

